

Various thermostat overrides

DCPS uses several types of thermostats and wall sensors. These are the main types and override instructions. If you have a thermostat that is not represented below, email a picture of the thermostat to arrendaled1@duvalschools.org and it will be added to the list.




JCI TEC thermostat

1. Walk in front of thermostat so the lens sees motion.
2. Press the down arrow to lower the setpoint.
3. If the on/off button is displayed it should be white.



Alerton microtouch wall sensor

1. Gently press and release the center of the cover. Pressing for 2 or more seconds will cancel the override.
2. Make sure the slide lever is down for cooler.

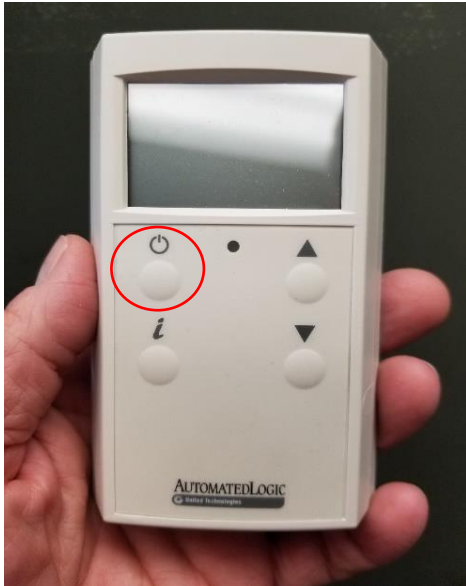

Automated Logic wall sensor

1. Press the on/off button one to three times for 30, 60 or 90 minutes of override.
2. Press the down arrow button to lower setpoint.



Blank plate sensor with override.

1. Press the button on the cover to start unit.

Warning: Classroom call buttons look similar. Make sure that you are using the wall temp sensor.



Generic wall sensor.

1. Press the button on the side to start unit.



Newer Automated Logic wall sensor

1. Press the on/off button one to three times for 30, 60 or 90 minutes of override.
2. Press the down arrow button to lower setpoint.